



Efficiency :

- Energy Efficiency Level VI(ErP/DoE)
- Meet COMMISSION REGULATION(EU) 2019/1782
- Meet DOE10 CFR Part 429 and 430

Emissions:

- FCC Part 15 class B
- VCCI class B
- CE CISPR 32 EN55032
- BS EN 55032

Immunity:

- EN 55035
- BS EN 55035

Electrical Spec:

Product Highlights

- Low cost ;
- Ultra Small Size ;
- Energy Efficiency;
- Suit LED Lighting,Display or Photo Frame,Network and USB Devices


Protection :

- Short Circuit Protection ;
- Over Voltage Protection ;
- Over Current Protection ;

Safety Standard :

- 60950-1 ;
- 62368-1 ;
- PSE 別表第八

QIG318USB-C Series L*W*H: 43*42.5*29.5mm

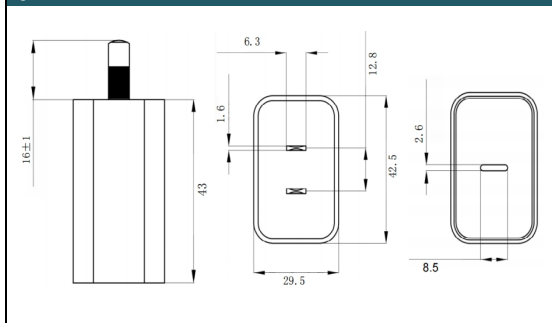

Input					
Description	Min	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Description	Min	Typ.	Max.	Units	Comment
Operating Temperature	0	-	40	°C	
Storage Temperture	-20	-	65	°C	
Operating Humidity	5	-	95	%RH	
Storage Humidity	5	-	95	%RH	

Typical model list:

output voltage	output current	precision	Ripple	Noise	Efficiency	No-Load
5.0V	3.0A	±5%	150mV	200mV	81.39%	0.1W
9.0V	2.0A	±5%	240mV	240mV	85.47%	0.1W
12.0V	1.5A	±5%	240mV	240mV	85.48%	0.1W
15.0V	1.2A	±5%	200mV	300mV	86.95%	0.1W
24.0V	0.75A	±5%	200mV	300mV	86.95%	0.1W

■ MeasurementCondition

- 1.Measurements shall be made with an oscilloscope with 20MHz bandwidth.
- 2.Outputs shall be bypassed at the connector with a 0.1μF ceramic disk capacitor and a 10μF electrolytic capacitor to simulate system loading.