

QG 12W Universal IEC62368-1 AC/DC Adapter 12W



Efficiency :

- Energy Efficiency Level VI(ErP/DoE)
- Meet COMMISSION REGULATION(EU) 2019/1782
- Meet DOE10 CFR Part 429 and 430

Emissions:

- FCC Part 15 class B
- VCCI Class B
- CE CISPR 32 EN55032
- BS EN 55032

Immunity:

- EN 55035
- BS EN 55035

Electrical Spec:

Product Highlights:

- Low cost ;
- Ultra Small Size ;
- Energy Efficiency;
- Suit LED Lighting,Display or Photo Frame,Network and USB Devices.


Protection :

- Short Circuit Protection ;
- Over Voltage Protection ;
- Over Current Protection ;

Safety Standard :

- 60950-1 ;
- 62368-1 ;
- PSE 別表第八

External dimensions:

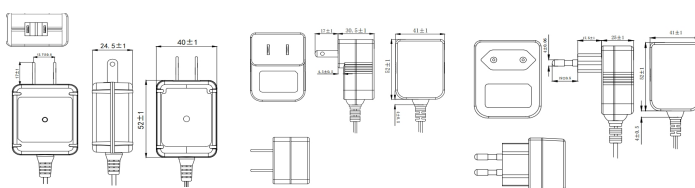

Input					
Description	Min	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Description	Min	Typ.	Max.	Units	Comment
Operating Temperature	0	-	40	°C	
Storage Temperture	-20	-	65	°C	
Operating Humidity	5	-	95	%RH	
Storage Humidity	5	-	95	%RH	

Typical model list:

output voltage	output current	precision	Ripple	Noise	Efficiency	No-Load
5.0V	2.0A	±5%	100mV	100mV	78.70%	0.1W
6.0V	2.0A	±5%	150mV	150mV	79.83%	0.1W
9.0V	1.3A	±5%	180mV	180mV	82.83%	0.1W
12.0V	1.0A	±5%	150mV	240mV	82.96%	0.1W
15.0V	0.8A	±5%	150mV	240mV	82.96%	0.1W
24.0V	0.5A	±5%	240mV	480mV	82.96%	0.1W

■ Measurement Condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.

2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system load

工厂地址：东莞市石排镇水吉吉安路8号良益工业大厦B座5-6楼

公司电话：0769-81818091

销售电话：180-2897-1545

公司网站: www.nexgen-power.com

业务邮箱: alex@nexgen-power.com